


NPC6ASZDB-BL

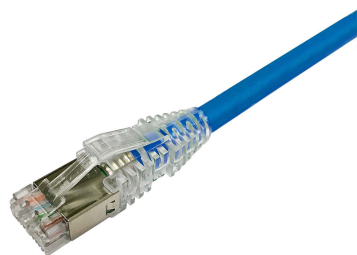

NPC RJ45 Patch Cord, category 6A, S/FTP, LSZH, blue

- High-performance patch cords exceeding industry standards supporting NETCONNECT channel specifications
- Standardized transparent, slim-line boots provides consistent patch cord appearance and supports highest density applications
- Colored clips are available to fit the transparent boot, eliminating the need of multiple colors for matching every jacket color
- Colored pull latch tabs are available for easier plug release handling from the modular jack

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA
Portfolio	NETCONNECT®
Product Type	Twisted pair patch cord
Product Series	NPC

General Specifications


ANSI/TIA Category	6A
Cable Type	S/FTP (shielded)
Conductor Type	Stranded
Interface Feature, connector A	Standard
Interface Feature, connector B	Standard
Interface, Connector A	RJ45 plug
Interface, Connector B	RJ45 plug
Jacket Color	Blue
Pairs, quantity	4
Wiring	T568B

Dimensions

Cable Assembly Length, minimum (m)	1
Cable Assembly Length, maximum (m)	100
Diameter Over Jacket	5.9 mm 0.232 in
Compatible Conductor Gauge, stranded	26 AWG

Ordering Tree

NPC6ASZDB-BL

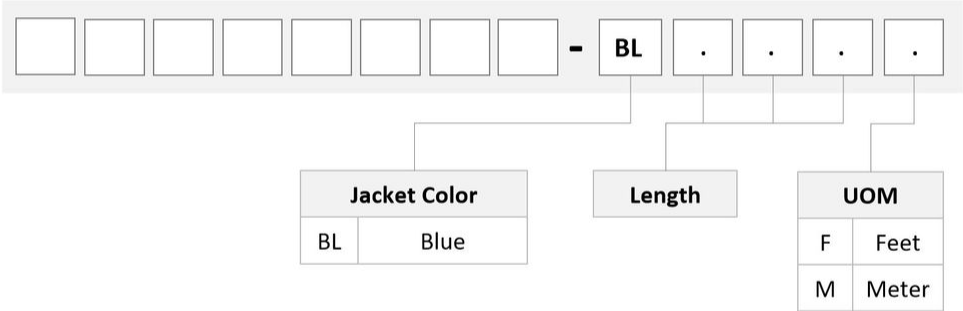

Mechanical Specifications

Plug Insertion Life, minimum 750 times

Environmental Specifications

Operating Temperature -20 °C to +60 °C (-4 °F to +140 °F)
Relative Humidity Up to 93%, non-condensing
Environmental Space Low Smoke Zero Halogen (LSZH)
Safety Standard UL 1863

Packaging and Weights

Packaging quantity 1

NPC6ASZDB-BL

Regulatory Compliance/Certifications

Agency

RCM



Classification

Compliant to electrical safety, EMC, EME & telecommunications requirements

Included Products

2 8 4 3 0 3 2 - 3

MP-Boot-S/SL-AB — Modular Plug Shielded Slim-Line Boot for Category 6A/6 and Category 5e EMT Plugs, 4.7 to 6.0 mm, transparent

6 - 2 1 1 1 9 8 1 - 3

MP-6AS-B-1 — Modular Plug Kit, category 6A, shielded, 8-position, 5.1 – 6.0 mm max cable jack OD, 100/bag