


AI

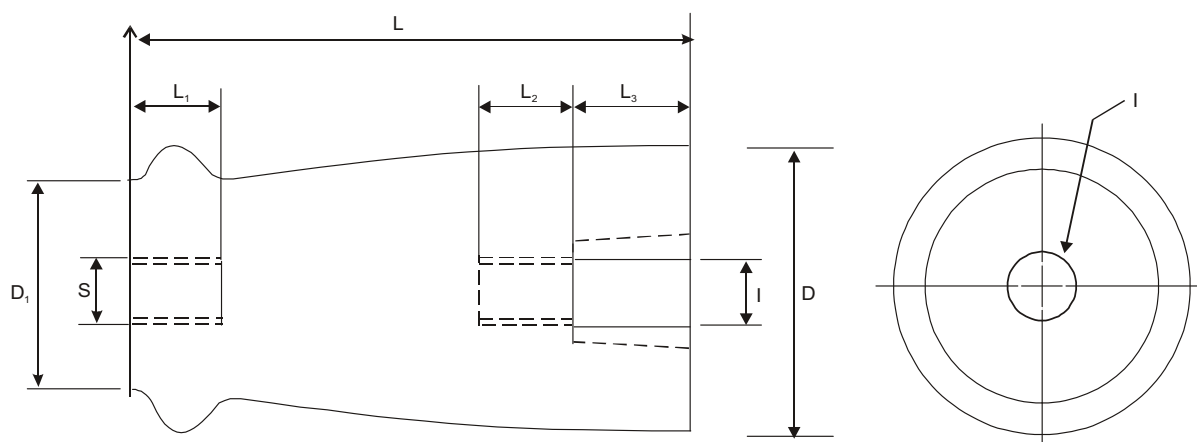

TIPO	Tensión nominal KV	Tensión de sostenimiento a frecuencia industrial por 1 minuto KV eficaz	Resistencia a rotura Kg.	Línea fuga mm	L	D	D ₁	L ₁	L ₂	L ₃	I	S
AI-3/400	3	21	400	78	75	45	35	14	14	25	3/8"	3/8"
AI-6/400	6	27	400	93	89	50	35	16	16	30	1/2"	1/2"
AI-12/400	12	35	400	127	120	62	44	22	25	32	5/8"	1/2"
AI-12/750	12	35	750	127	120	67	50	22	25	30	5/8"	1/2"
AI-12/1250	12	35	1250	150	140	80	52	22	25	23	3/4"	1/2"
AI-24/750	24	55	750	210	200	75	52	22	25	40	3/4"	1/2"